DEVELON

DX05P

500h

4

EURO 6

AUTOMOTIVE

Power Rating

Intermittent Rating kW (PS) / rpm	Max. Torque N.m (kg.m) / rpm	After Treatment System
177 (240) / 2500	883 (90) / 1500	DOC+DPF+SCR (No EGR)


※ LET : 82kgf.m @ 1,000rpm



Engine Specifications

Engine Model	DX05P
Cylinders and Arrangement	In-line type, 4-cylinder
Bore x Stroke	110 x 132 mm
Displacement	5.0 liter
Number of Valves	Intake 2, Exhaust 2 per Cylinder
Fuel System	Common Rail Direct Injection Controlled by ECU
Aspiration	Turbo charger & Intercooler
Aftertreatment	DOC+DPF+SCR (No EGR)
Breather System	OCV / Super Impactor
Flywheel Housing	SAE2
Oil Pan Capacity	21 liter (High), 15 liter (Low)
Lubrication Oil	CK-4 10W40 (Recommend) CI-4 or CI-4 (Possible)
Dimension (L x W x H)	946 x 835 x 932 mm
Dry Weight	608 kg (Engine Only)

Performance Curve

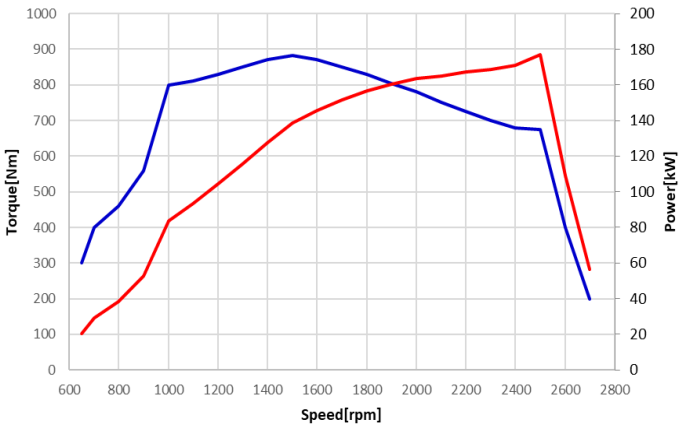

※ Specifications are subject to change without prior notice.

HD Construction Equipment Co., Ltd.
11F, GLOBAL R&D CENTER, 477 BUNDANG SUSEO-RO,
BUNDANG-GU, SEONGNAM-SI, GYEONGGI-DO, 13553, KOREA

HD CONSTRUCTION EQUIPMENT